


# Pro-Tatch Honda Gas Powered Wire Winder

call 1-877-407-8645 with questions




- 5.5 Horse Power Honda pull start gas motor. (**Shipped dry!**)
  - Belt drive on clutch side. Easy access and service as needed.
  - Chain drive on reel side. (Lubricate chain as needed.)
  - Chain is accessed by removing outside shield.
  - Shaft between clutch drive and reel drive rides on mounted bearings for years of use.
  - Clutch can be operated from either side of unit.
  - Standard split reel holds 1/2 mile of barbed wire and 1 mile of smooth wire.
  - Reel shaft rides on 2 replaceable moly impregnated poly bushings made right here, to last for years of use.
- Standard reel is designed with four tie-offs in four places to tie your roll tight before removing the flat end plate. This keeps your roll together and prevents spreading when you are done. (*Illustrated in photos below.*)
  - Wire guide can be operated from both sides of the unit.
  - Our 4", 8" and 4" mini reels will also work fine on this unit.
  - Units is designed with tie-off loops on the frame to hold it in place during operation.
  - This unit will come to you assembled on a pallet and will only need to be serviced with lubricants before use. (**Note: engine is shipped dry**)
  - Unit weighs 165 pounds.
  - Unit is designed with a lift hook in the center on the drive tube to assist while loading or unloading.
  - All shields manufactured from steel to last for many years of use.
  - Frame is manufactured from welded steel as is the entire unit.
  - Comfort grip rubber handles are standard on clutch handles and wire guide.
  - Like our other units, this winder is designed to set in one place and pull the wire towards you.
  - **ALWAYS have a weight on the end of the wire before you start rolling.** This keeps the wire from whipping around loosely as it comes to the end, near the winder. A short piece of chain or any small item that can drag without catching works fine. We used window weights out of old houses for many years. They work great if you can find them.
  - Always used great caution when operating any type of wire winder as accidents can happen in a split second when not staying alert. **Keep children away from unit at all times. Hotwoods recommends all operators be 18 years of age or older.**
  - As with any Pro-Tatch product, all replacement parts are available at Pro-Tatch Inc./Hotwoods.
  - See product video and get more information at [www.hotwoods.com](http://www.hotwoods.com) or call 1-877-407-8645.



Tie wires bent to shape of cone.



Wire tie off for wire being rolled.

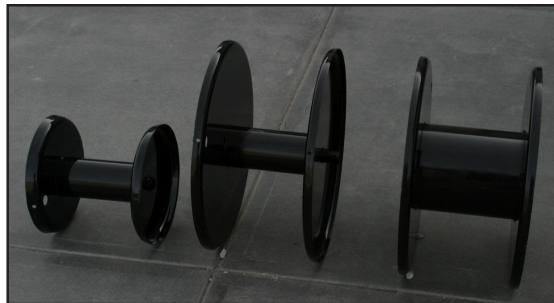

Solid spools: 4" mini, 4" and 8" centers.



Standard manual guide arm.

Unrolling, secure your gas powered winder by the tie offs on the frame, pull the wire away from the unit slowly. Make sure the clutch is in neutral or freewheel. You may need to adjust your motor on the frame with the 4 bolts on the engine at first to get it set to free wheel without turning the engine over. You can also unroll by tying the wire to the corner post and driving slowly away with the unit secured in the vehicle you are driving as you unroll. Hotwood's is in the process of developing an unrolling arm that will work with any of our reels along with new rolls like the Red Brand you buy new wire on.